



FRFC


	HEIGHT		WIDTH		DEPTH		WEIGHT
	mm	inch	mm	inch	mm	inch	
4- Drawer	1598	63	551	22	824	32	450
3- Drawer	1231	48	551	22	824	32	350
2- Drawer	864	34	551	22.8	24	32	250
1- Drawer	462	17	560	22.048	35	33	150



GOLD LOAN

Model	external dimension			internal dimension		
	height	width	depth	height	width	depth
16 Tray						
2 Drawer	1525	750	700	1325	550	445
12 Tray						
2 Drawer	1125	750	700	1025	550	445

ACCESSORIES

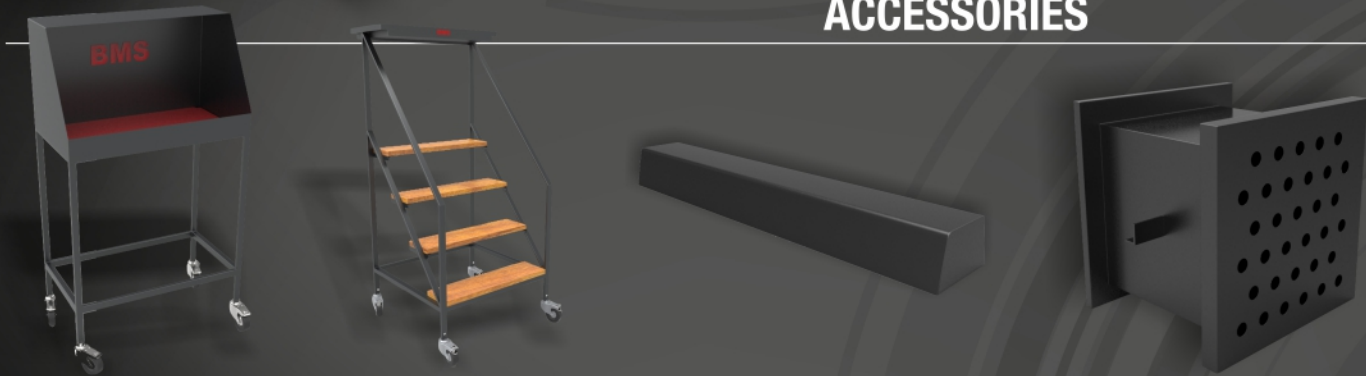

www.bmssafe.com



MIRARBINDO ENGINEERING PVT. LTD.

Call: +91 79 32446013, +91 95104 55111
Email: sales@bmssafe.com | Web: www.bmssafe.com

The contents and information on the catalogue is for general purposes. The recommendations of level of strength are relative and completely depend on the nature of tools used for any attack. All safes can be broken open given sufficient time, tools, torch (basic or simple home tools) expert skill and access. All warranties, recommendations and 'representations of any kind mentioned herein are disclaimed, including the implied warranties of merchantability and fitness for a particular use. The Company disclaims any claims, losses, demands, or damages of any kind whatsoever arising out of or resulting by reason or in consequence of any illegal breaking open of any product, or any theft, fire, robbery, fraud or other wrongful act done by any third Party with regard to Product including but not limited to direct, indirect, incidental, or consequential loss or damages, compensatory damages, injury, economic loss, or otherwise resulting from theft, fire, robbery, fraud or other wrongful act done by any third Party. The specifications, prices and features of the products may be changed at the sole discretion of the Company without prior notice.





www.bmssafe.com



DESIGN

BMS SDL are designed to provide maximum security reliability strength in highly automated new plant with 0% error.

DOORS & BODY

our cabinets structural design is very strong made from solid plates of high quality tested steel. **BMS** SDL speciality is that both main lock & renter lock are mounted on a solid steel plates from inside which does not damage being harmed from outside.

FINISH

BMS SDL is rust proof. It's all components passes through the anti- corrosion chemical treatment. All steel parts are first coated from red oxide primer and then two coats of paint based on PU as per customer requirement. Aluminum sheet on door front for further finish and look.

LOCKING DEVICE

Most important device for security in SDL is its lock. **BMS** provides high security 7 lever unpick able dual control key lock with brass lever, so designed that it is interchangeable with any locker unit. Our lock have shelf locking mechanism, it ensure high security. Custodians have not to relock.



BMS SAFE DEPOSIT LOCKER

Overall dimension for locker as per IS 5244: H- 2000mm. W-1080mm. D-575mm

Model	Locker	External Dimension (Tolerance: ± 25mm)			Internal Dimension (Minimum)			Weight in Kgs.	No. of Lockers
SDL-90	A	2000	1080	575	115	149	470	715	90
SDL-75	A	2000	1080	575	115	149	470	695	66
	C/2A				115	329	470		6
	F/4A				266	329	470		3
SDL-51	B	2000	1080	575	148	184	470	615	46
	E/2B				148	401	470		2
	H/4B				314	401	470		2
	2B1				314	184	470		1
SDL-52	B	2000	1080	575	148	184	470	615	48
	E/2B				148	401	470		2
	H/4B				314	401	470		2
SDL-32	D	2000	1080	575	178	238	470	525	28
	G/2D				178	506	470		2
	K/4D/L				394	506	470		2
SDL-21	F/4A	2000	1080	575	266	329	470	525	21
SDL-10	K/4D	2000	1080	575	375	506	470	525	10
SDL-60	B	2000	1080	575	148	184	470	655	60
SDL-45	C/2A	2000	1080	575	115	329	470	655	45
SDL-40	D	2000	1080	575	178	238	470	655	40
SDL-20	G/2D	2000	1080	575	178	506	470	525	20

Why Only BMS ?

- Indigenous product with latest preset plant.
- Quality safe manufacturer with a trust of 40 years.
- Minimum time delivery.
- PAN India presence.

BMS SAFE WITH SAFE DEPOSIT LOCKER

MODEL	HEIGHT	WIDTH	DEPTH	WEIGHT
FBR1525/SDL29	1525	750	700	1400
FBR2085/SDL28	2085	990	840	2800
FBR2085/SDL36	2085	990	840	2800
FBR2085/SDL46	2085	990	840	2800
FBR2085/SDL51	2085	990	840	2800
FBR2150/SDL56	2150	1290	840	3500
FBR2150/SDL75	2150	1290	840	3600
FBR2150/SDL90	2150	1290	840	3600